





Hydraulic toe jack



 **Features**

- » Can be used in any direction.
- » Housing revolves 360°.
- » Lowering speed can be adjusted precisely.
- » Removable lever.
- » With overload protection.
- » Capacity on the toe is 100%.
- » Complies with the Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.

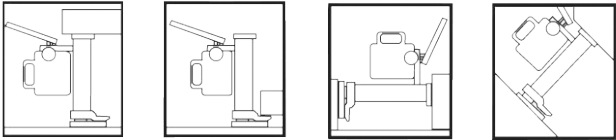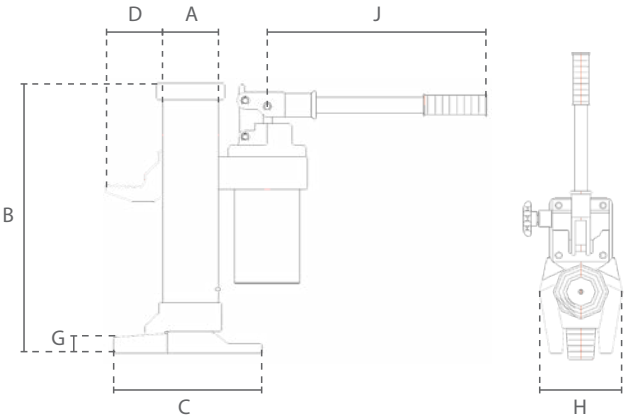

Specifications				
Article code	Capacity	Hoisting height	Effort for max load	Net weight
	ton	mm	N	kg
DC.0.HTJ.05	5,000	205	280	25
DC.0.HTJ.10	10,000	230	400	35
DC.0.HTJ.25	25,000	215	400	109

Dimensions (mm)							
Capacity	A	B	C	D	G	H	J
5,000	76	368	213	77	25	140	520
10,000	91	420	205	75	30	170	520
25,000	155	505	420	143	58	210	920