




Steel rack jack

Features

- » Can be used in any direction.
- » Made of high tensile forged steel.
- » Supporting parts are extra hardened.
- » Available with safety lever or ratchet lever with double pawls.
- » High transportability due to handles and foldable lever.
- » Capacity on the toe is 70%.
- » Complies with the Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.

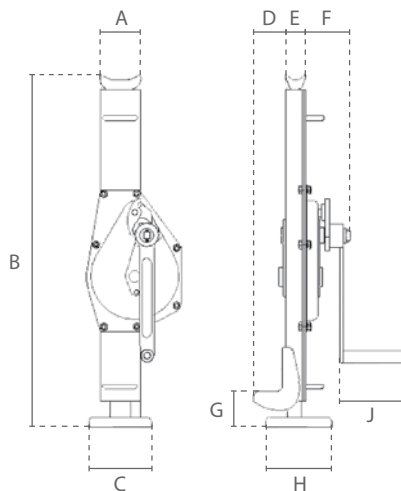

DC.0.DK

DC.0.DK.RL

Specifications					
Article code	Capacity	Lever type	Hoisting height	Effort for max load	Net weight
	ton		mm	N	kg
DC.0.DK.015	1,500	Safety lever	300	190	10,7
DC.0.DK.03	3,000		355	196	21,3
DC.0.DK.05	5,000		330	235	28,9
DC.0.DK.10	10,000		360	431	47
DC.0.DK.20	20,000		315	650	72
DC.0.DK.015.RL	1,500	Ratchet lever	300	190	11
DC.0.DK.03.RL	3,000		355	196	22
DC.0.DK.05.RL	5,000		330	235	29
DC.0.DK.10.RL	10,000		360	431	47

Dimensions (mm)									
Capacity	A	B	C	D	E	F	G	H	J
1,500	77	605	100	55	40	74	55	110	126
3,000	84	720	130	65	48	89	55	140	126
5,000	106	735	140	70	65	97	60	175	126
10,000	122	795	140	90	74	115	70	175	250
20,000	153	840	150	90	90	132	90	185	250