

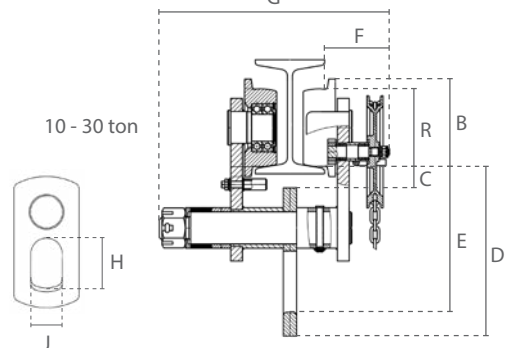
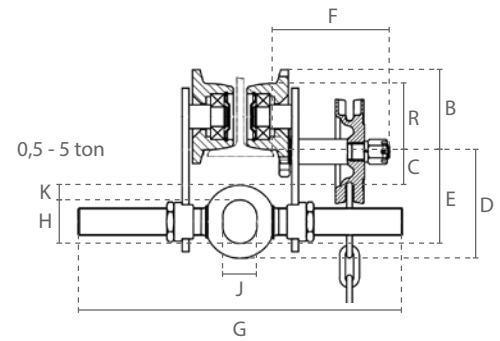


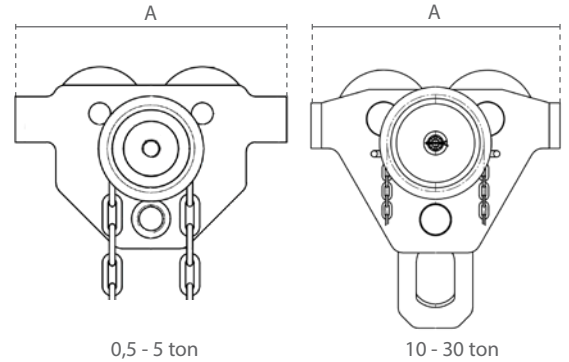

Geared trolley

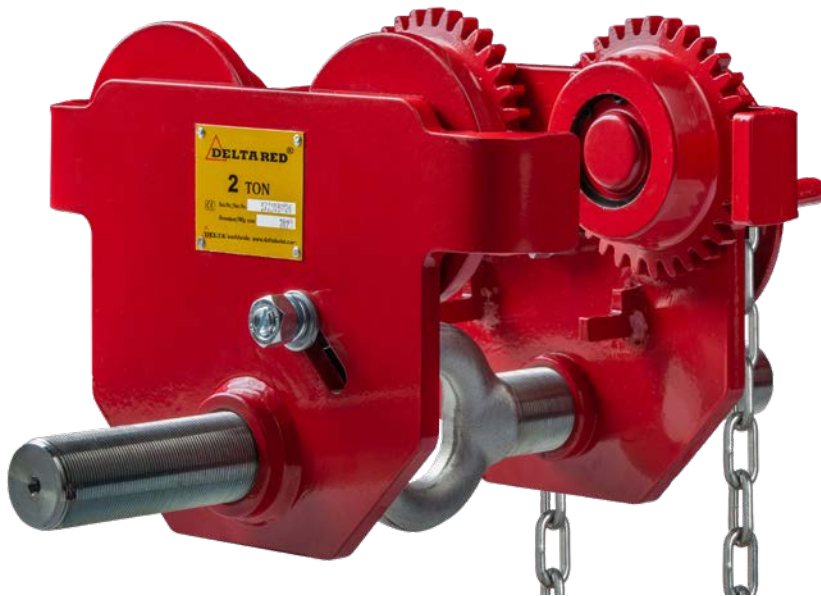

Features

- » Individually adjustable by turning the bolt. From 10 ton customisable by adjusting the spacers.
- » Safety bars serve as fall-, breaking- and impact protection. Additionally equipped with tilting protection.
- » Permanently lubricated, ball bearing mounted wheels allow for smooth traversing.
- » Suitable for most I- and H-beam profiles.
- » Complies with the Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.

Specifications						
Article code	Capacity	Hand chain	Suitable beam width	Min. radius	Wheel diameter (R)	Net weight
	ton	Øxmm	mm	m	mm	kg
DR.0.02700500	0,500	5 x 23,7	50-305	0,5	55	8,9
DR.0.02701000	1,000		58-305	0,7	68	13
DR.0.02702000	2,000		66-305	0,9	80	17,8
DR.0.02703000	3,000		74-305	1,2	100	29,1
DR.0.02705000	5,000		90-305	1	120	46,1
DR.0.03710000	10,000		130-305	2,5	150	91
DR.0.03720000	20,000		136-305	4,5	175	232
DR.0.03730000	30,000		136-305	4,5	210	241

Dimensions (mm)											
Capacity	A	B	C	D	E	F	G	H	J	K	
0,500	198	68	40	94	82	103	385	28	25	13	
1,000	238	82	31	102	85	103	388	37	29	17	
2,000	277	95	31	119	99	103	405	48	36	20	
3,000	324	116	31	139	113	136	429	56	46	26	
5,000	373	138	40	161	133	140	435	65	52	28	
10,000	467	165	40	318	273	122	432	115	72	-	
20,000	562	204	52	320	256	194	526	85	100	-	
30,000	680	247	45	370	300	208	545	100	110	-	