



Push trolley




DY.0.036



DB.0.036

Features

- » Individually adjustable by turning the bolt.
- » Safety bars serve as fall-, breaking- and impact protection. Additionally equipped with tilting protection.
- » Permanently lubricated, ball bearing mounted wheels allow for smooth traversing.
- » Suitable for most I- and H-beam profiles.
- » Complies with the Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.

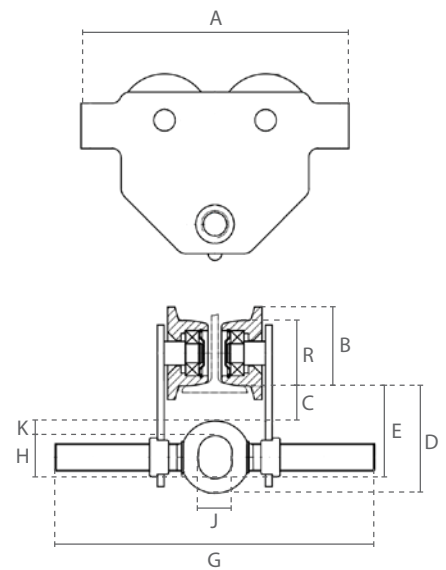

Specifications					
Article code	Capacity	Suitable beam width	Min. radius	Wheel diameter (R)	Net weight
	ton	mm	m	mm	kg
DY.0.036000500	0,500	50-305	0,5	55	5,4
DY.0.036001000	1,000	58-305	0,7	68	9,3
DY.0.036002000	2,000	66-305	0,9	80	14,8
DY.0.036003000	3,000	74-305	1,2	100	24,1
DY.0.036005000	5,000	90-305	1	120	41,1
DB.0.03600500	0,500	50-305	0,5	55	5,4
DB.0.03601000	1,000	58-305	0,7	68	9,3
DB.0.03602000	2,000	66-305	0,9	80	14,8

Dimensions (mm)									
Capacity	A	B	C	D	E	G	H	J	K
0,500	198	68	40	94	82	385	28	25	13
1,000	238	82	31	102	85	388	37	29	17
2,000	277	95	31	119	99	405	48	36	20
3,000	324	116	31	139	113	429	56	46	26
5,000	373	138	40	161	133	435	65	52	28