




Aluminium lever hoist

Features

- » Extremely lightweight and compact aluminium housing.
- » 250kg and 500kg supplied with carrying bag.
- » Maintenance friendly design. Brake and transmission are easy to access.
- » Measurement points on the hooks.
- » Double casing provides protection against dust and water.
- » Ergonomic lever with rubber sleeve.
- » Free spooling mode.
- » Complies with the Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.



0,25 - 0,5 ton

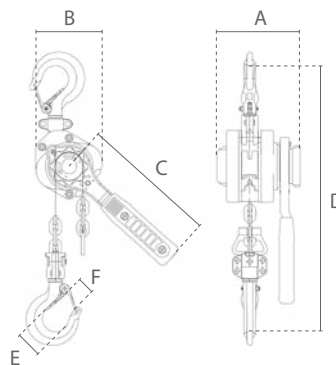

Specifications							
Article code	Capacity	Chain falls	Load chain	Effort for max load	Lever turns for 1m lift	Net weight	Extra weight
	ton		Øxmm	N		kg *	kg/m **
DC.0.0780250	0,250	1	4 x 12	206	23	1,3	0,4
DC.0.0780500	0,500	1	5 x 15	255	36	2,1	0,6
DC.0.0780750	0,750	1	5,6 x 15,7	303	35	3,8	0,7
DC.0.0781500	1,500	1	7,1 x 19,9	362	46	5,2	1,2

* without load chain ** per meter lifting height

Specifications	
Hooks	Drop-forged steel hooks with latch
Load chain	Galvanized load chain according to EN 818-7-T
Operating temperature	-10°C - +60°C
ATEX zone	Not suitable
Load type	Goods, may not be used to lift or transport people

Protection	
Overload protection	No overload protection
Brake	Automatic safety load brake with twin friction discs and pawls

Dimensions (mm)						
Capacity	A	B	C	D	E	F
0,250	95	80	160	230	34	22
0,500	100	93	160	265	34	22
0,750	126	110	208	315	40	26
1,500	142	133	238	340	45	31



DELTA RED[®]

VS

DELTA YELLOW[®]

VS

DELTA ALUM[®]

Corrosion resistant, caged cylindrical roller bearings for heavy-duty applications



Extremely durable steel brake disc with sintered brake pads



Standard brake disc

High-quality cast safety latches



Premium

Enhanced free spooling mode (pull out hand wheel)

No minimum preload required to activate the brake

Available with slip clutch overload protection

