




## Pulling hoist with steel casing

 **Features**

- » Suitable for lifting and pulling applications.
- » Simple and safe to operate.
- » Robust, corrosion-protected steel housing.
- » Parallel clamping system with large contact area.
- » Can be used in any direction.
- » Complies with the Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.

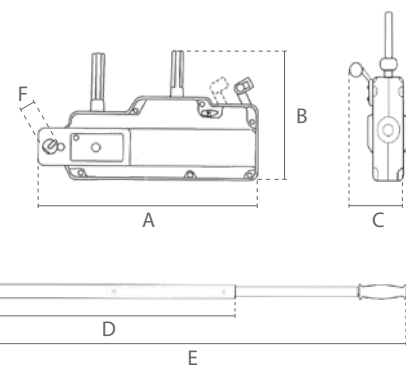

Specifications							
Article code	Lifting capacity	Pulling capacity	Steel cable	Min. breaking strength of cable	Forward travel	Net weight	Weight steel cable
	ton	ton	Ømm	kN	mm	kg	kg/20m
DC.0.0240000800	0,800	1,200	8.3	43,31	52	9	8

Specifications	
Tensile strength	1770 N/mm <sup>2</sup>
Wire rope construction	6x19+IWR
Minimum load	0 % WLL
Overload protection	Shear bolt overload protection
Load type	Goods, may not be used to lift or transport people

Dimensions (mm)						
Capacity	A	B	C	D	E	F
0,800	440	265	63	800	-	22