





Crane scale



SG.0.CS

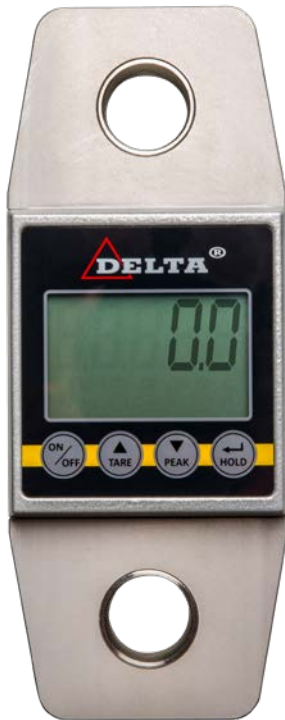

SG.0.CS.RC

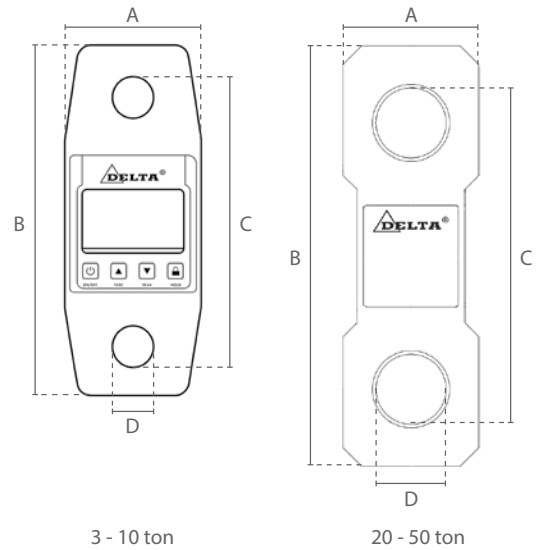

3 - 10 ton

20 - 50 ton

Features

- » Compact housing.
- » With backlit display.
- » Strengthened load area.
- » With overload alarm.
- » Powered by rechargeable lithium battery. Capacity 3000mAh allows for around 26 hours of operation.
- » Supplied with calibration report.
- » Complies with the Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.



3 - 10 ton

Specifications							
Article code		Capacity	Minimum load	Sensitivity	Net weight	with case	Suitable shackle
with wireless indicator	without wireless indicator	ton	kg	kg	kg	kg	DELTALOCK [®] ton
SG.0.CS.03.RC	SG.0.CS.03	3,000	18	1	1,7	3,3	4,750
SG.0.CS.05.RC	SG.0.CS.05	5,000	30	2	3,4	4,9	6,500
SG.0.CS.10.RC	SG.0.CS.10	10,000	50	5	6,8	8,3	12,000
SG.0.CS.20.RC	-	20,000	200	10	12,8	-	25,000
SG.0.CS.30.RC	-	30,000	200	10	15,4	-	35,000
SG.0.CS.50.RC	-	50,000	400	20	39,5	-	55,000

Specifications	
Accuracy	$\leq \pm 0.1\%$
Housing protection	IP 54
Operating temperature	-10°C - +40°C
Range in open space	50 m

Dimensions (mm)				
Capacity	A	B	C	D
3,000	87	231	181	23
5,000	87	231	189	29
10,000	87	281	223	36
20,000	116	360	288	60
30,000	126	366	292	60
50,000	180	500	392	72