
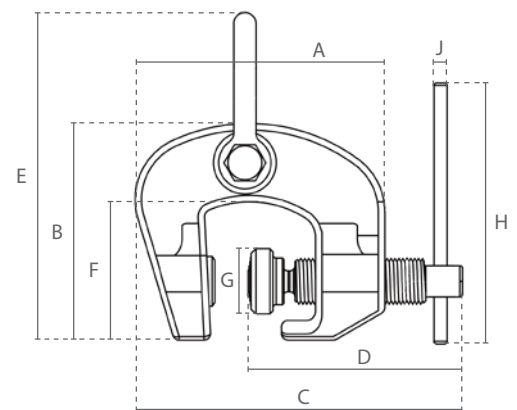


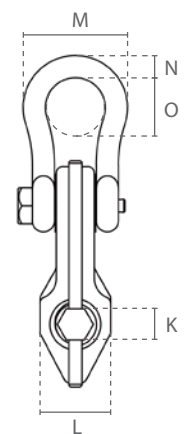

Screw clamp

 **Features**

- » Suitable for lifting, handling and aligning steel plates or -beams.
- » Hardened jaws.
- » Designed for sheets with a surface hardness of up to HRC 30.
- » Minimum load: 10% of WLL.
- » Complies with the Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.

Specifications

Article code	Capacity		Jaw range		Net weight	
	ton		mm		kg	
SG.0.01600500	0,500		0-28		0,8	
SG.0.01600750	0,750		0-22		3	
SG.0.01601500	1,500		0-32		4	
SG.0.01603000	3,000		0-50		6	
SG.0.01606000	6,000		0-75		18	

Dimensions (mm)

Capacity	A	B	C min	D	E	F	G	H	J	K	L	M	N	O
0,500	104	76	156	89	113	43	26	60	7	14	30	52	10	17
0,750	135	125	167	120	201	82	42	200	9	21	46	62	12	38
1,500	154	143	187	135	229	91	42	200	9	21	46	77	16	45
3,000	190	165	224	165	265	105	49	250	11	21	54	88	19	50
6,000	255	214	291	215	365	130	63	250	11	21	69	153	32	80