


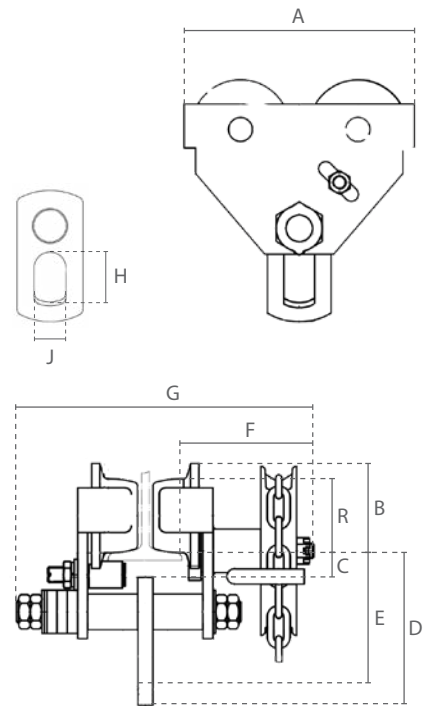

Sparkproof geared trolley

**Features**

- » Suitable for potentially dangerous and explosive environments. ATEX Zone 1 CE EX II 2G h IIC T4 / 2D h IIC T135°C
- » Completely copper-plated, with bronze-plated wheels.
- » Customisable by adjusting the spacers.
- » Safety bars serve as fall-, breaking- and impact protection. Additionally equipped with tilting protection.
- » Permanently lubricated, ball bearing mounted wheels allow for smooth traversing.
- » Suitable for most I- and H-beam profiles.
- » Complies with the Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.

Specifications						
Article code	Capacity	Hand chain	Suitable beam width	Min. radius	Wheel diameter (R)	Net weight
	ton	Øxmm	mm	m	mm	kg
DC.0.03300500	0,500	5 x 23,7	64-140	0,6	58	11,6
DC.0.03301000	1,000		64-140	0,8	75	17
DC.0.03302000	2,000		76-165	1,1	90	25,5
DC.0.03303000	3,000		76-305	1,4	110	42,8
DC.0.03305000	5,000		88-305	1	122	62
DC.0.03310000	10,000		125-305	1,3	151	98,4
DC.0.03320000	20,000		136-305	4,7	200	258,3

Dimensions (mm)									
Capacity	A	B	C	D	E	F	G	H	J
0,500	212	70	28	128	113	127	312	38	24
1,000	255	88	25	143	128	127	327	50	30
2,000	302	105	27	172	152	127	356	60	36
3,000	344	126	32	212	186	155	414	75	45
5,000	378	141	34	254	224	158	432	95	60
10,000	455	170	37	322	275	180	478	120	82
20,000	642	238	54	384	314	193	517	150	110