



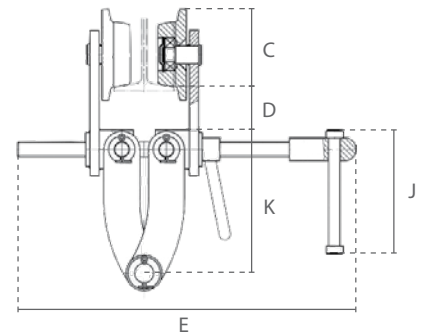

Trolley clamp

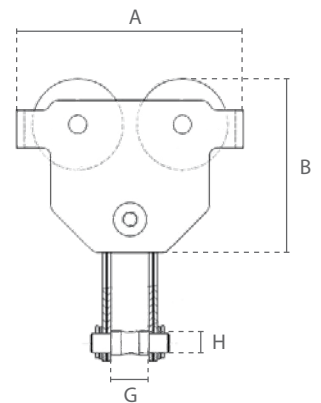

Features

- » Extremely shortened assembly times. Ideal for fast applications that require load traversing.
- » Individually adjustable by turning the threaded bolt. Secured by second counter safety lever.
- » Safety bars serve as fall-, breaking- and impact protection. Additionally equipped with tilting protection.
- » Permanently lubricated, ball bearing mounted wheels allow for smooth traversing.
- » Suitable for most I- and H-beam profiles.
- » Complies with the Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.

Specifications

Article code	Capacity	Suitable beam width	Min. radius	Wheel diameter (R)	Net weight
	ton				
ZM.LHTP.005C	0,500	64-180	0,8	55	9
ZM.LHTP.010C	1,000	64-203	1	68	16
ZM.LHTP.020C	2,000	76-203	1,1	80	20
ZM.LHTP.030C	3,000	76-203	1,3	100	33
ZM.LHTP.050C	5,000	100-305	1,4	120	60
ZM.LHTP.100C	10,000	150-305	2,5	151	97

Dimensions (mm)

Capacity	A	B	C	D	E	G	H	J	K
0,500	198	246	68	52	299	30	19	130	113
1,000	242	297	82	46	355	40	22	130	150
2,000	281	318	95	52	360	40	22	130	145
3,000	328	351	116	55	360	45	24	130	148
5,000	377	455	138	57	470	58	28	130	214
10,000	455	500	170	70	480	80	42	130	215