




## Tendeur d'arrimage Grade 80

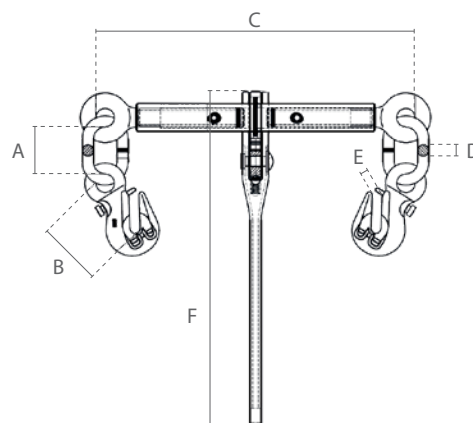

## Caractéristiques

- » Selon EN 12195-3.
- » Avec verrouillage de dévissage.

Code de l'article	Chaîne (mm)	Spécifications			Dimensions (mm)					
		LC (kN)	STF (kN)	Poids (kg)	A	B	C	D	E	F
YE.338.06.K	6	22	5,5	1,7	40	50	236-345	9	9	226
YE.338.08.K	8	40	10	4,7	53	63	342-497	13	10	375
YE.338.10.K	10	63	15,75	5,1	56	75	346-501	16	12	375
YE.338.13.K	13	100	15,9	7,6	66	95	378-538	20	15	375
YE.338.16.K	16	160	24	9,9	68	111	378-538	22	19	375
YE.338.06.OK	6	22	5,5	1,2	-	-	236-345	-	-	226
YE.338.08.OK	8	40	10	3,2	-	-	342-497	-	-	375
YE.338.10.OK	10	63	15,75	3,3	-	-	346-501	-	-	375
YE.338.13.OK	13	100	15,9	4,0	-	-	378-538	-	-	375
YE.338.16.OK	16	160	24	4,5	-	-	378-538	-	-	375
YE.338.08.HK	8	40	10	4,5	53	63	342-497	13	10	230
YE.338.10.HK	10	63	15,75	4,9	56	75	346-501	16	12	260
YE.338.08.OHK	8	40	10	3,0	-	-	342-497	-	-	230
YE.338.10.OHK	10	63	15,75	3,1	-	-	346-501	-	-	260