
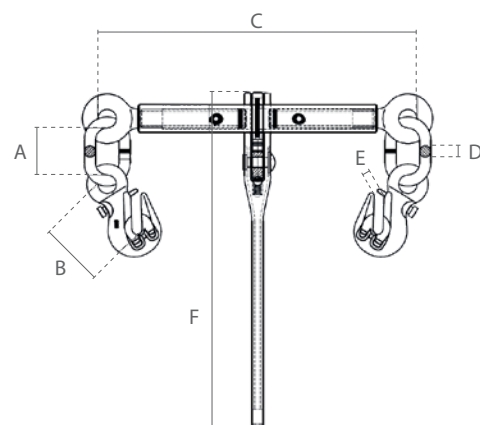


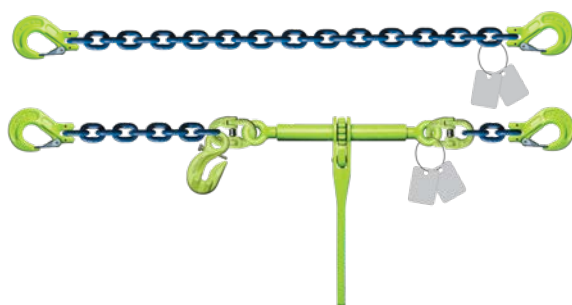

Tendeur d'arrimage Grade 100

 **Caractéristiques**

- » Selon EN 12195-3.
- » Avec verrouillage de dévissage.

Code de l'article	Spécifications				Dimensions (mm)					
	Chaîne (mm)	LC (kN)	STF (kN)	Poids (kg)	A	B	C	D	E	F
YE.10.338.08.K	8	50	12,5	4,7	53	65	342-497	14	10	375
YE.10.338.10.K	10	80	20	5,7	56	80	346-501	16	12	375
YE.10.338.13.K	13	134	20,1	8,4	66	100	378-538	20	16	375
YE.10.338.08.OK	8	50	12,5	3,5	-	-	342-497	-	-	375
YE.10.338.10.OK	10	80	20	3,8	-	-	346-501	-	-	375
YE.10.338.13.OK	13	134	20,1	4,3	-	-	378-538	-	-	375
YE.10.338.08.HK	8	50	12,5	4,5	53	65	342-497	14	10	230
YE.10.338.10.HK	10	80	20	5,5	56	80	346-501	16	12	260
YE.10.338.08.OHK	8	50	12,5	3,0	-	-	342-497	-	-	230
YE.10.338.10.OHK	10	80	20	3,1	-	-	346-501	-	-	260