

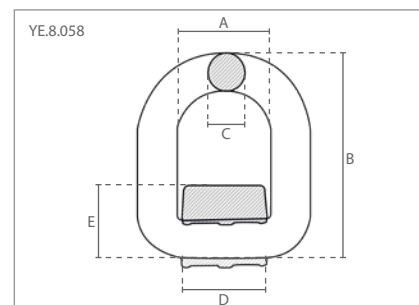


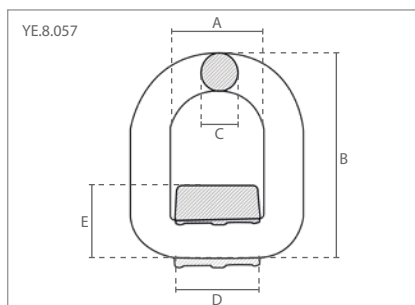

Toebehoren volgens EN 1677 Grade 80

Aanlashaken met klep
Aanlasogen
Aanlasogen met veer

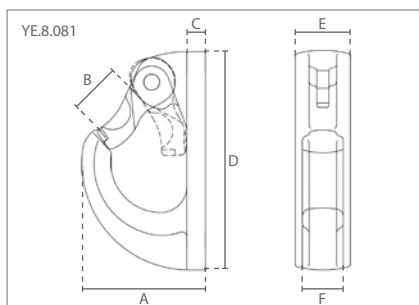

Specificaties			Afmetingen (mm)					
Artikelnummer	Capaciteit (ton)	Gewicht (kg)	A	B	C	D	E	F
YE.8.081.01	1,000	0,4	53	18	9	87	20	15
YE.8.081.02	2,000	0,6	64	26	10	112	27	20
YE.8.081.03	3,000	0,9	75	30	11	128	32	26
YE.8.081.05	5,000	1,8	93	35	20	160	40	30
YE.8.081.08	8,000	3,0	106	40	16	180	51	40
YE.8.081.12	12,000	6,2	140	51	24	236	61	51
YE.8.081.20	20,000	11,5	192	70	24	292	85	60

Specificaties				Afmetingen (mm)				
Artikelnummer	Capaciteit (ton)	LC (kN)	Gewicht (kg)	A	B	C	D	E
YE.8.057.01	1,120	22	0,4	41	79	13	37	35
YE.8.057.02	2,000	40	0,5	42	88	14	40	37
YE.8.057.03	3,150	63	0,7	45	94	17	43	40
YE.8.057.05	5,300	106	1,5	55	118	22	61	52
YE.8.057.08	8,000	160	2,4	70	141	27	67	61
YE.8.057.15	15,000	300	5,8	97	188	34	90	67
YE.8.057.20	20,000	400	15,4	149	286	46	125	84

Specificaties				Afmetingen (mm)				
Artikelnummer	Capaciteit (ton)	LC (kN)	Gewicht (kg)	A	B	C	D	E
YE.8.058.01	1,120	22	0,4	41	79	13	37	34
YE.8.058.02	2,000	40	0,5	42	88	14	40	36
YE.8.058.03	3,150	63	0,7	45	94	17	43	39
YE.8.058.05	5,300	106	1,5	55	118	22	51	49
YE.8.058.08	8,000	160	2,5	70	141	27	71	54
YE.8.058.15	15,000	300	5,8	97	188	34	90	72