



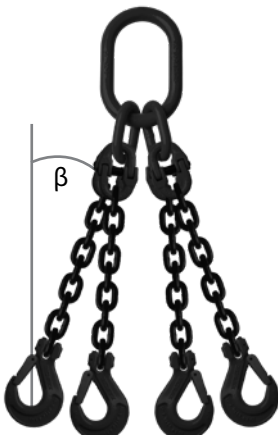

Chain slings

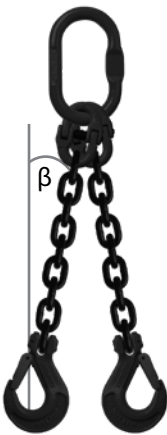

80

Chain size	Capacity				
	1 leg	2 leg		3-4 leg	
	0°	β < 45°	β = 45°-60°	β < 45°	β = 45°-60°
Ømm	ton	ton	ton	ton	ton
6	1,120	1,600	1,120	2,350	1,700
8	2,000	2,800	2,000	4,250	3,000
10	3,150	4,250	3,150	6,700	4,750
13	5,300	7,500	5,300	11,200	8,000
16	8,000	11,200	8,000	17,000	11,800
20	12,500	17,000	12,500	26,500	19,000
22	15,000	21,200	15,000	31,500	22,400
26	21,200	30,000	21,200	45,000	31,500
32	31,500	45,000	31,500	67,000	47,500

100

Chain size	Capacity				
	1 leg	2 leg		3-4 leg	
	0°	β < 45°	β = 45°-60°	β < 45°	β = 45°-60°
Ømm	ton	ton	ton	ton	ton
6	1,400	2,000	1,400	3,000	2,120
8	2,500	3,550	2,500	5,300	3,750
10	4,000	5,600	4,000	8,000	6,000
13	6,700	9,500	6,700	14,000	10,000
16	10,000	14,000	10,000	21,200	15,000
20	16,000	22,400	16,000	33,500	23,600
22	19,000	26,500	19,000	40,000	28,000
26	26,500	37,500	26,500	56,000	40,000
32	39,300	55,000	39,300	82,500	59,000



Chain slings Grade 80

🇬🇧 Features

- » According to EN 818-4.
- » Available in various lengths, with different hook combinations and with or without grab hooks.
- » Supplied with test certificate and CE declaration of conformity.





Chain slings Grade 100

🇬🇧 Features

- » Available in various lengths, with different hook combinations and with or without grab hooks.
- » Supplied with test certificate and CE declaration of conformity.

